

**MASSACHUSETTS INSTITUTE OF TECHNOLOGY  
DEPARTMENT OF OCEAN ENGINEERING AND  
CIVIL AND ENVIRONMENTAL ENGINEERING  
13.10J/1.573J Structural Mechanics  
Fall 2001  
Final Exam**

**9:00am - noon  
Wednesday, December 19, 2001  
Room 3-370**

**OPEN BOOK & NOTES  
FIRST, READ ALL PROBLEMS !!!  
INDIVIDUAL EFFORT**

1. (20 pts) A cylindrical beam of diameter  $d$ , length  $L$ , Young's modulus of elasticity  $E$  and specific weight  $\gamma$  is pin-supported at B and placed against a smooth (frictionless) wall at A. If no buckling happens, answer the following five questions:

(Hint : Due to the weight, the beam will experience bending and axial force. Bending moments resulting from the axial force due to deflection may be neglected.)

- (a) (4 pts) Find the reaction force at A
- (b) (4 pts) Express the axial force as a function of  $x$ .
- (c) (4 pts) Express the bending moment as a function of  $x$ .
- (d) (4 pts) Express the maximum compressive stress as a function of  $x$ .
- (e) (4 pts) Find the position along  $x$  where the maximum compressive stress occurs.

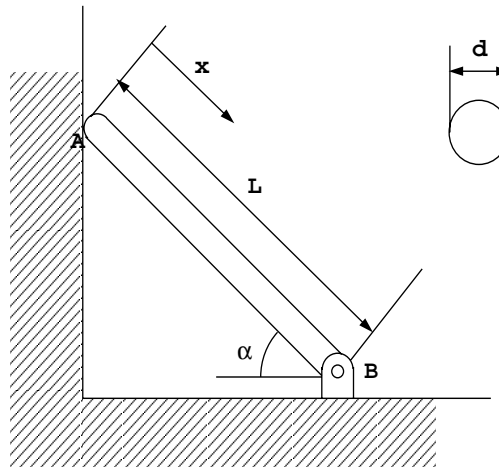


Figure 1: Problem 1

2. (15 pts) A cylindrical shaft consisting of two parts of length  $\frac{L}{2}$  each having two different polar moments of inertia  $J_a$  and  $J_b$  ( $J_a > J_b$ ) and shear modulus of rigidity  $G$  is fixed at A and B. If a torque  $T$  is applied at distance  $x$  from A, determine  $x$  so that the torsional reactions at A and B become equal.

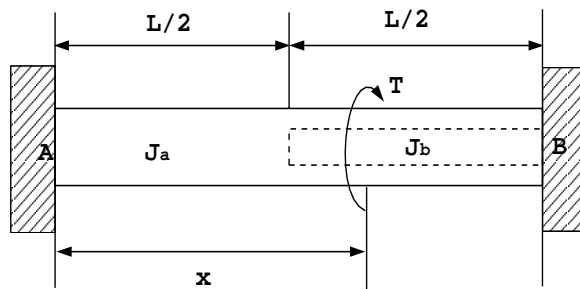


Figure 2: Problem 2

3. (20 pts) A slender curved circular cross section beam with constant bending rigidity  $EI$  is fixed at one end. The beam is a quarter of the circle with radius of  $R$  and is subject to moment  $M_o$  at  $45^\circ$  whose direction is normal to  $x - y$  plane as shown in Figure 3. Using the energy method and considering bending effects only, determine:

- (a) (7 pts) The horizontal deflection  $\delta_h$  at the free end.
- (b) (6 pts) The vertical deflection  $\delta_v$  at the free end.
- (c) (7 pts) The angle of rotation  $\theta$  at the free end.

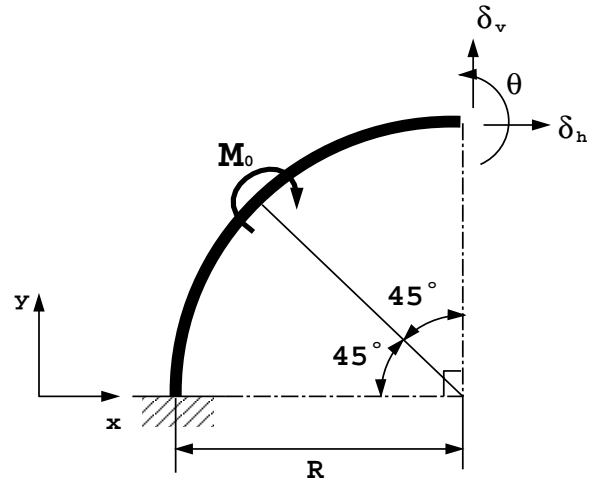


Figure 3: Problem 3

4. (20 pts) A structure in the form of a three-sided rectangular shape lies in a horizontal plane, has both ends clamped, and is subject to a vertical force  $P$  as shown in Figure 4. The structure is made of a slender beam with a constant circular cross section of radius  $r$  and has Young's modulus of elasticity  $E$  and shear modulus of rigidity  $G$ .

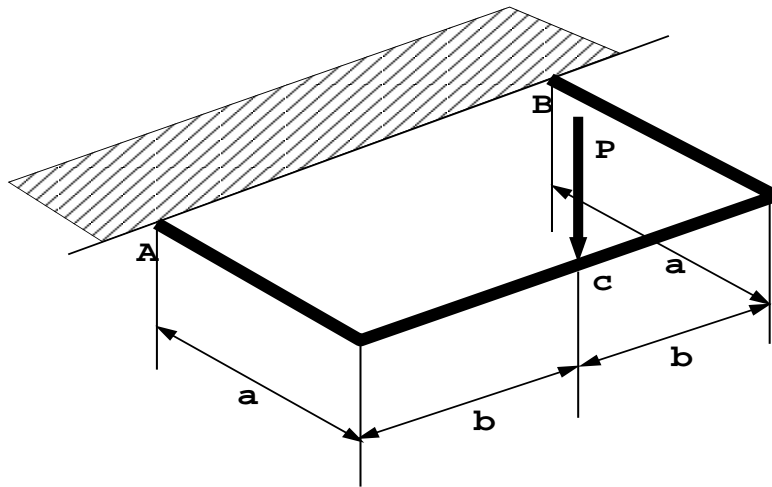


Figure 4: Problem 4

Using the energy method and considering only bending and torsion effects:

- (15 pts) Determine the reactive torque at the supports, A and B.
- (5 pts) Find the vertical deflection at C under the load  $P$ .

5. (25 pts) Answer the following questions.

- (a) (10 pts) A weightless cylindrical beam of length  $L$ , bending rigidity  $EI$  and cross sectional area  $S$  is installed with fixed supports at A and B at temperature  $T$  as shown in Figure 5. The material has a linear coefficient of thermal expansion  $\alpha$ . Using the differential equation formulation, determine the increase in temperature  $\Delta T$  at which elastic instability (buckling) first occurs.

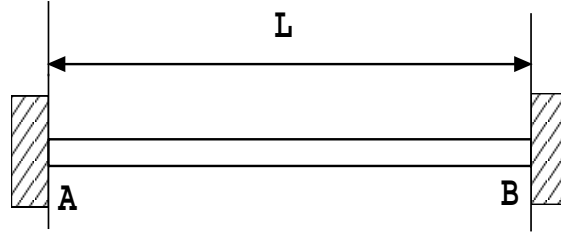


Figure 5: Problem 5-1

- (b) (15 pts) If the beam has a varying cross section of a circular shape with a varying bending rigidity  $EI(x) = EI_A + (EI_B - EI_A)\frac{x}{L}$  as shown in Figure 6, using the trial function  $y(x) = A(1 - \cos(\frac{2\pi}{L}x))$  for approximating the deflection, derive an approximate analytical expression for the critical temperature increase  $\Delta T$  at which elastic instability (buckling) first occurs using the energy method.

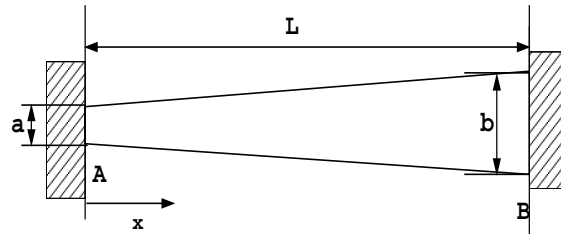


Figure 6: Problem 5-2

Note:

$$\begin{aligned}\int x \cos(ax) dx &= \frac{1}{a^2}(\cos(ax) + ax \sin(ax)) \\ \int x \sin(ax) dx &= \frac{1}{a^2}(\sin(ax) - ax \cos(ax))\end{aligned}$$